

Lens: optional



High quality MPEG-4 and JPEG dual streaming network camera

Key Features

- MPEG-4/JPEG digital signal output at VGA image size with up to 30 ips.
- MPEG-4 and JPEG dual stream output for simultaneous live monitoring and high resolution recording.
- Progressive output provides clear images, even when the subject is moving.
- High sensitivity: 1.1 lux at F1.2, 1.5 lux at F1.4.
- Up to 16x automatic electronic sensitivity enhancement.
- Electronic shutter for anti flicker.
- Video Motion Detector with 4 programmable detection areas and 3 sensitivity levels.
- Monitor output for easier installation.
- Up to 3x digital zoom with controlled by browser.
- Camera title display: Up to 20 alphanumeric characters on browser.
- SD Memory card slot for alarm recording and backup upon network failure. Recorded data can be downloaded by using FTP command.
- Alarm sources including Terminal input, VMD and Panasonic alarm command can trigger actions including SD memory recording/FTP image transfer, E-mail notification, Alarm indication, Terminal output and Panasonic protocol output.
- Built-in microphone for audio (one-way).
- Built-in network interface (10Base-T / 100Base-TX).
- Power over Ethernet (PoE) IEEE 802.3af.
- Multiscreen: Images from 8 cameras can be displayed in two separate Quad screens (JPEG only). 20 characters camera title is available for each camera.
- FTP client function enables periodic image data transfer or transfer upon alarm.
- Alarm e-mail notification

- Max bit rate/client for MPEG-4 (64 / 128 / 256 / 512 / 1,024 / 1,536 / 2,048 / 3,072 / 2,048 / 4,096 kbps) combined with Total bit rate control (64 / 128 / 256 / 512 / 1,024 / 2,048 / 4,096 kbps / Unlimited) allowing flexible network management.
- Supported Protocol: TCP/IP, UDP/IP, HTTP, FTP, SMTP, DHCP, DNS, DDNS, NTP, RTP and SNMP.
- Multi-language GUI and setup menu: English, French, Italian, Spanish, German, Russian (PAL), English, French (NTSC), (Installation required except for English).

Standard Accessories

• CD-ROM* 1 pc.	The following parts are used during installation procedures.
• Operating Instructions (English version) 1 pc.	
• Code Label 1 pc.	
• Power cord (only for the WV-NP240) 1 pc.	
	• Safety wire lug (for wall) 1 pc.
	• Safety wire plate (for ceiling) 1 pc.
	• Screw (M2.5) 1 pc.
	* Panasonic IP setting software, the viewer software and the operating instructions (PDF) are included on the CD-ROM.

Optional Accessories

1/3-type 2x Varifocal Lens
WV-LZA61/2S
(3.8 ~ 8 mm)



1/3-type 8x Varifocal Lens
WV-LZ62/8S
(5 ~ 40 mm)




Specifications

TV System	NTSC	PAL
Camera	Image Sensor	
	1/3-type progressive scan CCD	
	Effective Pixels	
	659 (H) x 494 (V)	
	Scanning Mode	
	Progressive scan	
	Scanning Area	
	4.8 (H) x 3.6 (V) mm	
	Minimum Illumination	
	Color (30IRE): 1.5 lux (Sens up: OFF), 0.09 lux (Sens up: 16x) at F1.4	
	White Balance	
	AUTO / HOLD	
	Light Control	
	ALC or ELC	
	BLC	
	ON / OFF	
	AGC	
	Always ON	
	Electronic Shutter	
	For flicker less mode: 1/100 ~ 3/100 (Auto select)*	
	Electronic Sensitivity UP	
OFF / AUTO (2x, 4x, 8x, 16x)		
Digital Zoom		
1x, 1.5x, 2x, 2.5x, 3x, Controlled by browser GUI		
Video Motion Detector		
4 areas, Sensitivity: High / Middle / Low		
Back Focus Adjustment		
Manual		
Lens Mount		
CS-mount		
Synchronization		
Internal		
Browser GUI	Camera Control	
	Brightness, AUX ON/OFF	
	Display Mode	
	Spot, Quad: Image from 8 cameras can be displayed in 2 different Quad screens (JPEG only), 20 characters camera title available.	
	Digital Zoom	
	1x, 1.5x, 2x, 2.5x, 3x, Zoom by camera	
	Camera Title	
	Up to 20 alphanumeric characters	
	Clock Display	
	Time: 12H / 24H, Date: 5 formats on the browser, Summer time (Manual)	
	Alarm Control	
	Reset	
	One Shot Capture	
	A still picture is displayed on a newly opened window.	
	Audio	
ON / OFF		
GUI / Setup Menu Language		
English, French (Installation required for French)		
English, French, Italian, Spanish, German, Russian (Installation required except for English)		
System Log		
Up to 100 (Internal), Up to 4,000 (SD memory) error logs		
Supported OS		
Microsoft® Windows® 2000 Professional SP4, Microsoft® Windows® XP Professional/Home SP2 The language of the OS must be same as selected GUI language.		
Supported Browser		
Internet Explorer 6.0 SP2 (Windows® XP Home / Professional SP2) Internet Explorer 6.0 SP1 (Only Windows® 2000 Professional SP4)		
Network	Network IF	
	10Base-T / 100Base-TX, RJ45 connector IEEE 802.3af, PoE compatible	
	Image Resolution	
	VGA (640 x 480) / QVGA (320 x 240)	
	Image Compression	
	MPEG-4: Image quality: LOW / NORMAL / FINE, Transmission type: UNICAST / MULTICAST JPEG: Image quality: 10 steps, Transmission type: PULL / PUSH MPEG-4 and JPEG dual streaming, JPEG multi-resolution supported.	
	Image Refresh Rate	
	0.1 / 0.2 / 0.33 / 0.5 / 1 / 2 / 3 / 5 / 6 / 10 / 15 / 30 ips (Max rate will be 5 ips-VGA, 10 ips-QVGA when transmitting JPEG and MPEG-4 simultaneously)	
	Audio Compression	
	G.726 (ADPCM) 32 kbps / 16 kbps	
	Total Bit Rate	
	64 / 128 / 256 / 512 / 1,024 / 2,048 / 4,096 kbps and unlimited	
	Max Bit Rate / Client (MPEG-4)	
	64 / 128 / 256 / 512 / 1,024 / 1,536 / 2,048 / 3,072 / 4,096 kbps	
	Supported Protocol	
	TCP/IP, UDP/IP, HTTP, RTP, FTP, SMTP, DHCP, DNS, DDNS, NTP, SNMP	
	FTP Client	
	Alarm image transfer, FTP Periodic transfer	
No. of Simultaneous Users		
8 (Depends on network conditions)		
SD Memory Card (Option)		
Alarm REC / Backup upon network failure. Compatible SD card: Panasonic 64 MB, 128 MB, 256 MB, 512 MB, 1 GB, 2 GB model		
Alarm E-mail		
Up to 4 e-mail addresses		
User Registration		
Up to 16 users		
User/Host Level		
3 Levels: Administrator, Camera control, Live only		
Security Measures		
User authentication (ID 32 digit, PW 32 digit), Host authentication (IP address)		
Alarm	Alarm Source	
	VMD, Command alarm, Terminal input	
Alarm Actions		
SD memory recording/FTP image transfer, e-mail notification, Terminal output, Indication on browser, Panasonic protocol output		
Input / Output	Monitor Output	
	1.0 V [p-p] / 75 Ω / NTSC composite signal / ø3.5 mm mini jack	
	1.0 V [p-p] / 75 Ω / PAL composite signal / ø3.5 mm mini jack	
External I/O Terminals		
1x Alarm input / 1x Alarm output, 1x AUX output		
Microphone		
Built-in microphone		
General	Safety / EMC Standard	
	UL (6500 Edition2), FCC (Part15 ClassA), CE (EN55022, EN55024, ClassB), C-UL (E60065), DOC (ICES003 ClassA), GOST (R 51558).	
	Power Source / Consumption	
	24 V AC, 60 Hz 4.8 W / 12 V DC 400 mA / PoE (IEEE802.3af): 4.2 W	
	WV-NP240: 220 ~ 240 V AC, 50 Hz, 5.0 W / PoE (IEEE802.3af): 4.2 W	
	WV-NP244: 24 V AC, 50 Hz 4.8 W / 12 V DC 400 mA / PoE (IEEE802.3af): 4.2 W	
	Ambient Operating Temperature	
	-10 °C ~ +50 °C (14 °F ~ 122 °F)	
	Ambient Operating Humidity	
	Less than 90 % (without condensation)	
Dimensions		
72 mm x 65 mm x 158 mm (2-13/16" x 2-9/16" x 6-1/4")		
Weight		
Approx. 450 g (0.99 lbs.) WV-NP240: 470 g (1.03 lbs.) WV-NP244: 450 g (0.99 lbs.)		


*Flicker may appear when the object is darker than specified level.

Part Names and Functions

Side View

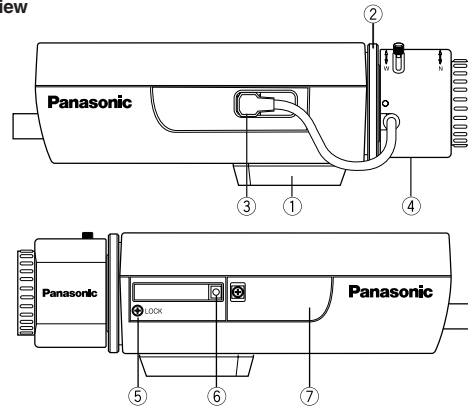


Rear View

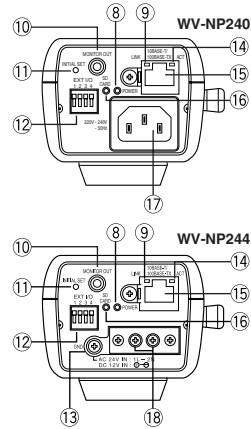

- ① Tripod Mount Base
- ② Back Focus Adjusting Ring
- ③ ALC Lens Connector
- ④ Lens (option)
- ⑤ Focus Fixing Screw
- ⑥ Microphone
- ⑦ SD Memory Card Slot
- ⑧ Power Indicator (green)
- ⑨ Link Indicator
- ⑩ Monitor Out Connector
- ⑪ INITIAL SET Button
- ⑫ External I/O Terminals
- ⑬ Ground Terminal
- ⑭ Access Indicator
- ⑮ Network Connector
- ⑯ SD Memory Error Indicator (red)
- ⑰ AC Inlet 220 V ~ 240 V 50 Hz
(only for the WV-NP240)
- ⑱ AC 24 V/DC 12 V Power Cable Terminals
(only for the WV-NP244)

Appearance

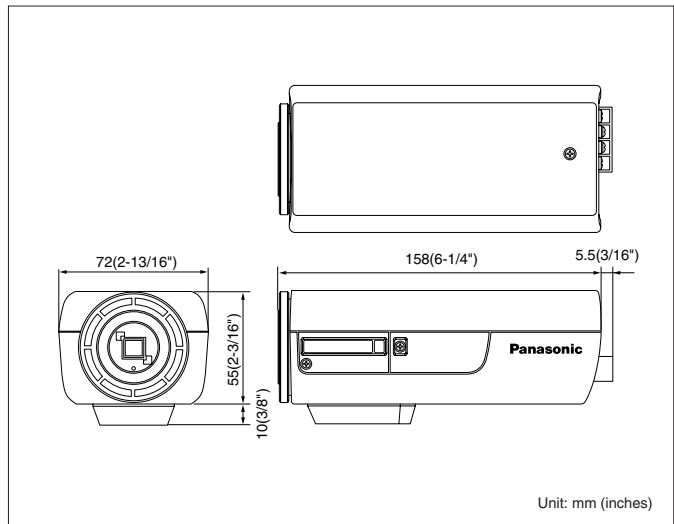

Trademarks and registered trademarks

– Microsoft, and Windows are registered trademarks of Microsoft Corporation in the U.S. and other countries.
– SD logo is a trademark.

Important

– Safety Precaution: carefully read the operating instructions and installation manual before using this product.
– Panasonic can not be responsible for network performance and/or other manufacturer products that reside on the network.

- All TV pictures/menu are simulated.
- Weights and dimensions are approximate.
- Specifications are subject to change without notice.
- These products may be subject to export control regulations.
- Product pictures shown in this catalog are all NTSC models.

DISTRIBUTED BY:

Panasonic

Panasonic is the brandname of Matsushita Electric.

Printed in Japan

(2A-007L)